ROMAN BLIND INSTALLATION INSTRUCTIONS

IMPORTANT NOTES:

- 1. Please, check that all parts (BRACKETS AND CORD CLEAT/CHILD SAFETY DEVICE) have been supplied before you begin to assemble your new Roman Blind.
- 2. Ensure that the blind is mounted level for correct operation.
- 3. If installing on plaster or wallboard where possible pick up timber stud. If you are unable to locate timber stud, use suitable wall plug or toggle for plasterboard to hold the brackets.


1. POSITIONING BLINDS

As per your order, determine the correct fitting location - On the window frame or wall - Outside Mount

- 2. INSTALLING MOUNTING BRACKETS:
- 1. The Installation Brackets (photo 1) are fixed directly onto the architrave or a wall, spaced evenly. Make sure all brackets are level.
- 2. The end brackets should be 100mm from each with additional brackets spread evenly in between.
- 3. Make sure that spacing of the brackets does not interfere with the headrail pulleys.

NOTE: You will need to provide your own screws for blind installation. The screw size we would normally use is 7G 20-25mm screw size but be careful not to choose the screw that has a long body as it could go through the headboard. Also be careful to choose the right screw for the right application i.e. screw for metal, timber, aluminium, etc...



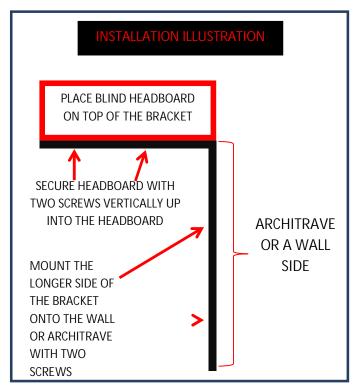

3. ATTACHING BLIND TO THE BRACKET – SEE THE INSTALATION ILLUSTRATION ABOVE RIGHT

Place up the blind (wide part down) onto the top of the bracket. Attach the blind with a screw vertically up into the headboard of the blind.

4. OPERATING CORDLOCK ROMAN BLIND

To lower the blind: Pull gently downwards on all the operating cords together (to release the cord lock) then carefully raise the cords to the desired location. With a quick easy downwards motion, the cordlock will lock the cords.

To raise the blind: Pull gently downwards until the desired location is reached, then with a quick easy upwards motion, the cordlock will lock the blind in that position.

5. ATTACHING CORD CLEAT

Position the cord cleat against the window at a height that is comfortable to use, that will keep the cords out of the reach from children and pets.

Fasten the Cleat with two screws. NOTE: Cleat will not prevent strangulation if children wrap pull cords around their necks. Please take care of young children around corded blinds or blinds with chain

MARNING - ALL WINDOW COVERINGS WITH CORD OR CHAIN!

TO AVOID CREATING POSSIBLE STRANGULATION HAZARD FOR CHILDREN, THE CORDED OR CHAINED INTERNAL WINDOW COVERING MUST BE INSTALLED IN SUCH A WAY THAT A LOOSE CORD OR A CHAIN CANNOT FOR A LOOP 220mm OR LONGER AT A HEIGHT OF LESS THAN 1600mm ABOVE FLOOR LEVEL.

* A CORD/CHAIN GUIDE MAY BE INSTALLED LOWER THAN 1600mm ABOVE FLOOR LEVEL IF THE CORD CHAIN IS SUFFICIENTLY SECURED OR TENSIONED TO PREVENT A LOOP 220mm OR LONGER FROM BEING FORMED.

*IF A CORD/CHAIN GUIDE IS INSTALLED LOWER THAN 1600mm ABOVE FLOOR LEVEL, IT MUST BE DESIGNED TO PREVENT A CHILD FROM BEING ABLE TO REMOVE THE CORD/CHAIN.